

The Stratic Defuzzifier for Discretised General Type-2 Fuzzy Sets

Sarah Greenfield^{a,*}, Francisco Chiclana^{a,b}

^a*Institute of Artificial Intelligence, School of Computer Science and Informatics,
De Montfort University, Leicester LE1 9BH, UK.*

^b*Andalusian Research Institute on Data Science and Computational Intelligence (DaSCI),
University of Granada, Spain.*

Abstract

Stratification is a feature of the type-reduced set of the general type-2 fuzzy set, from which a new technique for general type-2 defuzzification, Stratic Defuzzification, may be derived. Existing defuzzification strategies are summarised. The stratified structure is described, after which the Stratic Defuzzifier is presented and contrasted experimentally for accuracy and efficiency with both the Exhaustive Method of Defuzzification (to benchmark accuracy) and the α -Planes/Karnik-Mendel Iterative Procedure strategy, employing 5, 11, 21, 51 and 101 α -planes. The Stratic Defuzzifier is shown to be much faster than the Exhaustive Defuzzifier. In fact the Stratic Defuzzifier and the α -Planes/Karnik-Mendel Iterative Procedure Method are comparably speedy; the speed of execution correlates with the number of planes participating in the defuzzification process. The accuracy of the Stratic Defuzzifier is shown to be excellent. It is demonstrated to be more accurate than the α -Planes/Karnik-Mendel Iterative Procedure Method in four of six test cases, regardless of the number of α -planes employed. In one test case, it is less accurate than the α -Planes/Karnik-Mendel Iterative Procedure Method, regardless of the number of α -planes employed. In the remaining test case, the α -Planes/Karnik-Mendel Iterative Procedure Method with 11 α -Planes gives the most accurate result, with the Stratic Defuzzifier coming second.

Keywords: general type-2 fuzzy set, defuzzification, type-reduction, Stratic Defuzzifier, stratified type-reduced set, type-reduced set shell

*Corresponding author

Email addresses: s.greenfield@dmu.ac.uk (Sarah Greenfield), chiclana@dmu.ac.uk (Francisco Chiclana)

1. Introduction

A concept initially proposed in Zadeh’s pioneering 1975 paper [48], Type-2 Fuzzy Sets (T2FSs) extend Type-1 Fuzzy Sets (T1FSs) in such a way that their membership grades are themselves T1FSs as opposed to crisp numbers. T2FSs are particularly suited to inferencing under conditions of high uncertainty [15, 23, 35]. They exist in two forms, the interval, whose secondary membership grades are uniformly 1, and the general, with secondary membership grades in $[0, 1]$. Interval type-2 Fuzzy Inferencing Systems (FISs) are computationally simpler than their general counterparts [35]; for them varied applications have been developed [1, 3, 5, 7–9, 11, 38, 39, 42, 46]. As yet, owing to its colossal computational complexity, relatively few general type-2 fuzzy logic applications have been developed [4, 6, 10, 12, 13, 29, 30, 40, 41], though this number is growing. In recent years algorithms have been devised that dramatically reduce the general type-2 FIS’s computational complexity [20, 21, 25, 31, 49].

In this paper we present an innovative computational complexity reducing algorithm based on *stratification*, an intrinsic feature of the type-reduced set of a general T2FS. This new technique resembles Liu’s α -Planes Method [31] in so far as the general type-2 fuzzy set is decomposed into horizontal planes; the difference resides in the number of planes involved and their positions on the z -axis. For the established α -Planes Method these are parameters chosen by the developer, whereas with Stratic Defuzzification they are a naturally occurring by-product of stratification. Moreover, it is more closely aligned with the data than is the α -Planes Method; for this reason, it is reasonable to expect that it gives more accurate results. Thus the two motivations for presenting this new technique are its intuitive appeal and the expectation of its engendering highly accurate results. **This strategy may be applied in a wide variety of contexts, but it is particularly suited to control applications for which accuracy and speed are essential.**

The Mamdani Type-2 FIS (Figure 1) takes crisp numerical inputs and processes them through three stages: fuzzification, inferencing, and lastly defuzzification, which is the focus of this paper. Via defuzzification, the *aggregated set*, a T2FS generated by the second stage of inferencing, is transformed into a single crisp value. Defuzzification of a discretised T1FS is a straightforward, one-stage operation; for a discretised T2FS defuzzification is more complex, comprising two stages [34]:

1. Type-reduction, transforming the T2FS into a T1FS termed the *Type-Reduced Set (TRS)*;
2. defuzzification of the TRS.

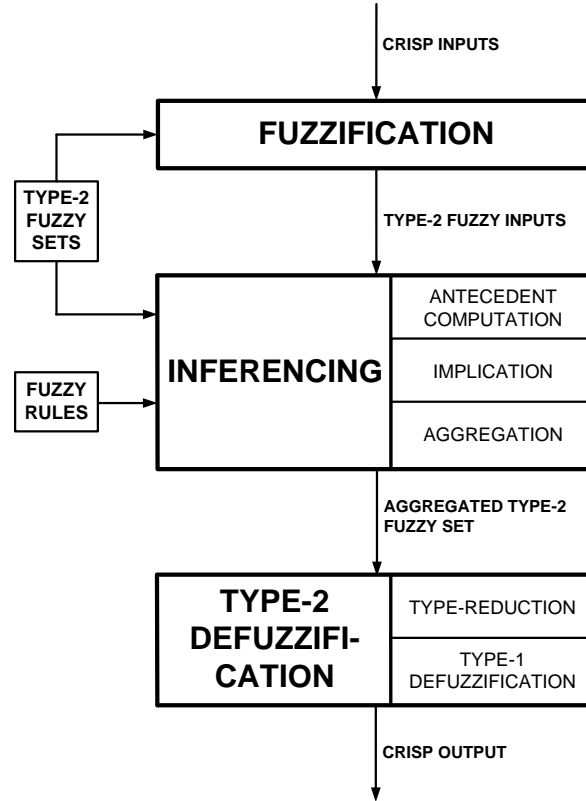


Figure 1: The Mamdani Type-2 FIS [18].

Hence, as a by-product of defuzzification, the TRS is an intermediary linking the originating T2FS to the defuzzified output.

The next section sets out the definitions and assumptions pertaining to the remainder of the paper. Section 3 concerns type-2 defuzzification techniques, and in Section 4 the Stratic Defuzzifier is presented. Experiments evaluating this new algorithm are reported on in Section 5. The paper concludes with Section 6.

2. Preliminaries

A subset A of a larger set X , normally referred to as the universe of discourse, can be defined using the characteristic or indicator function that takes the value 1 (full membership) on A and 0 elsewhere. A subset A is a collection of elements with a common property, and it is the fulfilment of this property that determines whether an element of X is a member of the subset A (indicator function output 1) or not (indicator function output 0). In this paper, it is assumed that the universe of discourse is the continuous closed unit interval, i.e. $X \equiv U = [0, 1]$. Partial membership of elements of X in a subset A is the characteristic of the ‘fuzzy’ subset concept. For simplicity, it is habitual to write ‘set A on X ’ rather than ‘subset A on X ’; this convention is adopted in this paper. Depending on the precision to which membership degrees are presented, there are two main sorts of fuzzy sets in the literature:

Type-1 fuzzy set (T1FS). These are characterised by precise numeric membership functions $\mu_A: X \rightarrow U$, i.e. given an element $x \in X$ its membership grade of A , $\mu_A(x)$, can be precisely quantified by a number in U . The concept of membership function is more general than the concept of indicator function, which means that a subset on X is a special kind of T1FS. Formally, a T1FS A on X is defined as follows [47]:

$$A = \{(x, \mu_A(x)) \mid \mu_A(x) \in U \forall x \in X\}. \quad (1)$$

Type-2 fuzzy set (T2FS). When (at least one of) the values $\mu_{\tilde{A}}(x)$ cannot be precisely measured with one number in U but a set on U or, in general, a type-1 fuzzy set on U is needed, we say that the set \tilde{A} on X is a T2FS. Formally, a T2FS \tilde{A} on X is defined as follows [2, 37]

$$\tilde{A} = \{(x, u, \mu_{\tilde{A}}(x, u)) \mid x \in X; u \in U; \mu_{\tilde{A}}(x, u) \in U\}, \quad (2)$$

where $\mu_{\tilde{A}}: X \times U \rightarrow U$ is the membership function of \tilde{A} .

The set $J_x = \{(x, u) \mid \mu_{\tilde{A}}(x, u) > 0\}$ is known as the primary membership of x , while the values $\mu_{\tilde{A}}(x, u)$ ($\forall u$) are known as the secondary membership grades of x . When secondary membership grades are all identical and constant on their respective primary memberships then the T2FS is called an *interval* T2FS (IT2FS). In particular, a normal IT2FS’s secondary membership grades are all identically 1 and it is defined as follows:

$$\tilde{A} = \{(x, u, 1) \mid x \in X; u \in U\}. \quad (3)$$

Because $X \equiv [0, 1]$, a T2FS is a surface within the unit cube represented by (x, u, z) co-ordinates such that $x \in U$, $u \in J_x \subseteq U$, and $z = \mu_{\tilde{A}}(x, u) \in U$. The intersection of a vertical plane through the x -axis parallel to the $u - z$ plane or a horizontal plane through the z -axis, parallel to the $x - u$ plane of a T2FS surface produces a vertical or a horizontal *slice*, respectively. In mathematical notation, the T2FS's \tilde{A} vertical slice at x will be the set $\{(x, u, \mu_{\tilde{A}}(x, u)) \mid u \in U; \mu_{\tilde{A}}(x, u) \in U\}$, while its horizontal slice at z will be the interval IT2FS \tilde{A}_z with membership function

$$\mu_{\tilde{A}_z}(x, u) = \begin{cases} 0, & \mu_{\tilde{A}}(x, u) < z \\ z, & \mu_{\tilde{A}}(x, u) \geq z \end{cases}. \quad (4)$$

Both the primary and secondary domains of a T2FSs need to be discretised for computer processing. The degree of discretisation is the separation of the corresponding slices (vertical or horizontal) of the T2FS.

Throughout this paper, we are assuming the following [20]:

1. Secondary membership functions are convex, i.e. $\forall x \in X$

$$\mu_{\tilde{A}}(x, \lambda u_1 + (1 - \lambda)u_2) \geq \lambda \mu_{\tilde{A}}(x, u_1) + (1 - \lambda) \mu_{\tilde{A}}(x, u_2) \quad \forall (x, u_1), (x, u_2) \in J_x; \lambda \in [0, 1]. \quad (5)$$

Thus, when the first variable (x) is fixed, $\mu_{\tilde{A}}(x, u)$ is continuous on the second variable (u) and $J_x = [\underline{\mu}_{\tilde{A}}(x), \bar{\mu}_{\tilde{A}}(x)] \subseteq U$, where $\underline{\mu}_{\tilde{A}}(x) = \inf\{u \mid (x, u) \in J_x\}$ and $\bar{\mu}_{\tilde{A}}(x) = \sup\{u \mid (x, u) \in J_x\}$ are respectively called the lower and upper membership functions of T2FS \tilde{A} . The closed region whose boundaries are the lower and the upper membership functions of \tilde{A} is known as its Footprint Of Uncertainty (FOU).

2. The *grid method of discretisation* for general T2FSs [14, 25] is employed. In this straightforward procedure the $x - u$ plane is divided evenly into a rectangular grid in accordance with the degrees of discretisation of the x and u -axes (Figure 2). The surface of the fuzzy set, consisting of the secondary membership grades corresponding to each grid point (x, u) of the FOU, may be represented by a matrix of the secondary grades, for which the x and u co-ordinates are implied by the secondary grade's position within the matrix.
3. The centroid method of defuzzification for T1FSs is used [28, Page 336]: Let A be a non-empty type-1 fuzzy set that has been discretised into n vertical slices (at x_1, x_2, \dots, x_n). X_A , the centroid of A , is calculated by this




Figure 2: The Grid Method of Discretisation, in which each red spot indicates a point of intersection that falls within the FOU.

formula:

$$X_A = \frac{\sum_{i=1}^{i=n} \mu_A(x_i) x_i}{\sum_{i=1}^{i=n} \mu_A(x_i)} = \frac{\sum_{i=1}^{i=n} u_i x_i}{\sum_{i=1}^{i=n} u_i}. \quad (6)$$

4. The minimum t-norm is employed.

3. Type-Reduction of the T2FS

This section is concerned with defuzzification of the T2FS via type-reduction. Existing strategies for the general T2FS are presented.

3.1. The Wavy-Slice Representation Theorem

An *embedded T2FS (embedded set)* or *wavy-slice* [35] (Figure 3) is a special kind of T2FS. The process to construct an embedded set of a given T2FS is: For every primary domain value only one of the possible secondary domain values is selected plus the corresponding associated secondary membership grade [19]. Formally, given a T2FS \tilde{A} with membership function $\mu_{\tilde{A}}: X \times U \rightarrow U$, for discrete sets $X_d = \{x_1, x_2, \dots, x_N\} \subseteq X$ and $U_d = \{u_1, u_2, \dots, u_M\} \subseteq U$, an embedded T2FS \tilde{A}_e of \tilde{A} is defined as the following T2FS

$$\tilde{A}_e = \{(x_i, u_{x_i}, \mu_{\tilde{A}}(x_i, u_{x_i})) \mid u_{x_i} \in J_{x_i} \subseteq U_d \forall i = 1, \dots, N\}. \quad (7)$$

In 2002 Mendel and John proved that a T2FS can be defined as the union of its embedded T2FSs [35], i.e. $\tilde{A} = \bigcup_{j=1}^n \tilde{A}_e^j$, where $\tilde{A}_e^j = \{(x_i, u_i^j, \mu_{\tilde{A}}(x_i, u_i^j)) | u_i^j \in J_{x_i} \forall i = 1, \dots, N\}$ and $n = \prod_{i=1}^N \#J_{x_i}$. This result is known as the Wavy-Slice Representation Theorem.




Figure 3: Two embedded T2FSs, represented by different flag styles. The height of the flag indicates the secondary membership grade. For both the primary and secondary domains the degree of discretisation is 0.1. The shaded region indicates the FOU.

3.2. Exhaustive Defuzzification

Type-2 defuzzification techniques are derived from and incorporate type-1 defuzzification strategies. The algorithm based on the Wavy-Slice Representation Theorem, known as *Exhaustive Defuzzification*, processes every embedded set in turn and, consequently, it is absolutely precise¹ [35]. Unfortunately, its enormous computational complexity means that it is a highly inefficient method. The first stage, which overwhelmingly bears the brunt of the computational cost, is the type-reduction of the T2FS into its TRS [17, 19]:

$$C_{\tilde{A}} = \left\{ \left(\frac{\sum_{i=1}^N x_i \cdot u_{k_i}}{\sum_{i=1}^N u_{k_i}}, \mu_{\tilde{A}}(x_1, u_{k_1}) * \dots * \mu_{\tilde{A}}(x_N, u_{k_N}) \right) \middle| \forall (u_{k_1}, u_{k_2}, \dots, u_{k_N}) \in J_{x_1} \times J_{x_2} \times \dots \times J_{x_N} \right\}, \quad (8)$$

where $*$ is a t-norm.

¹Discretisation unavoidably brings with it an element of approximation. However the Exhaustive Method does not introduce further inaccuracies.

3.3. Efficient Alternatives to Exhaustive Defuzzification

Since the early years of the millennium a number of techniques have been devised that drastically reduce the computational cost of general type-2 defuzzification [20, 25, 31, 33, 49]. Greenfield and Chiclana, in [17], describe the evaluation of three algorithms relative to Exhaustive Defuzzification, the Sampling Defuzzifier, Vertical Slice Centroid Type-Reduction, and the α -Planes Method. The latest addition to the options available for type-2 defuzzification is the General Greenfield–Chiclana Collapsing Defuzzifier [20].

3.3.1. The Sampling Defuzzifier

This technique [25] is a highly efficient, cut-down version of the Exhaustive Defuzzifier. The principle is to reduce the computational cost of type-reduction by randomly selecting and processing a sample of embedded T2FSs (Subsection 3.1). A full description of this strategy may be found in [25]. This approach is non-deterministic; the sample size is the choice of the FIS developer.

3.3.2. Vertical Slice Centroid Type-Reduction

Proposed by Lucas *et al.* in 2007 [33], this approach is extremely straightforward and intuitive. This technique works by cutting the T2FS into vertical slices. As each slice is a T1FS, it is easily defuzzified. The slice's domain value is paired with its defuzzified value, so constructing a T1FS which is readily defuzzified, giving the defuzzified value of the originating T2FS.

3.3.3. The α -Plane Representation

In 2008 Liu [31, 36] propounded the α -Planes Representation², originally conceived as a mechanism to generalise the *Karnik-Mendel Iterative Procedure*. This technique works by decomposing the general T2FS into a collection of evenly spaced α -planes. These are horizontal slices similar to interval T2FSs. Through repeated invocation of an interval defuzzification technique such as the KMIP, the general T2FS is type-reduced. The recent increase in the number of applications employing general type-2 fuzzy logic [6, 12, 13, 29, 40, 41] may be largely attributed to the α -Planes Method.

²Independently of Liu, Wagner and Hagrais proposed the notion of *zSlices*, which are equivalent conceptually to α -planes [43].

3.3.4. *The General Greenfield–Chiclana Collapsing Defuzzifier*

A recent addition to the catalogue of type-2 defuzzification options, the General Greenfield–Chiclana Collapsing Defuzzifier (GGCCD) converts a general T2FS into a T1FS that is an approximation to the *Representative Embedded Set (RES)*, for which the defuzzified value is defined to equate to that of the originating T2FS. This T1FS set is termed the *Generalised Representative Embedded Set Approximation (GRESA)*; as a T1FS the GRESA is easily defuzzified. Consequently the collapsing algorithm diminishes the computational cost of general type-2 defuzzification. The GGCCD is an iterative approach, full details of which may be found at [20].

3.4. *Interval Defuzzification via the Karnik-Mendel Iterative Procedure*

The *Karnik-Mendel Iterative Procedure (KMIP)* [26] is a widely adopted approach to type-reduction for an interval T2FS. Type-reduction via the KMIP results in an interval which may be regarded as a T1FS. The KMIP is a highly efficient method for finding the interval endpoints. The defuzzified value is deemed to be situated at the interval's midpoint, and is an approximation, as in general the distribution of the TRS tuples over the interval is not symmetrical.

Since 2001, when the KMIP was first published, various enhancements have been proposed [32, 44] that produce the same output whilst employing differing search strategies. In 2011 the optimum version of the KMIP in terms of efficiency was shown to be the *Enhanced Iterative Algorithm with Stop Condition (EIASC)* [45, Section III]. Since EIASC is a highly efficient version of the KMIP, it is employed in the experiments described in Section 5.

4. **Stratic Defuzzification**

In the previous section existing options for the defuzzification of the type-2 fuzzy were discussed. Now we turn to the theme of this paper, the Stratic Defuzzifier.

4.1. *The Stratified Structure of the TRS*

The Stratic Method of Defuzzification exploits an inherent characteristic of the TRS, namely *stratification*. The stratified structure of the TRS was first described by Greenfield and John in 2008 [22]. The TRS membership function of a discretised general T2FS is essentially a set of tuples. Figures 4 to 6 show typical TRSs obtained from randomly generated embedded set samples of sizes 50, 500, and 5000, drawn from the same T2FS. The tuples are represented by dots which

visibly align themselves into layers or *strata*. That these strata manifest themselves is attributable to the fact that type-reduction involves the selection of the minimum secondary membership grade for each embedded set. Repeatedly the same minima reoccur, each time associated with a different domain value. In this way a stratum is formed.

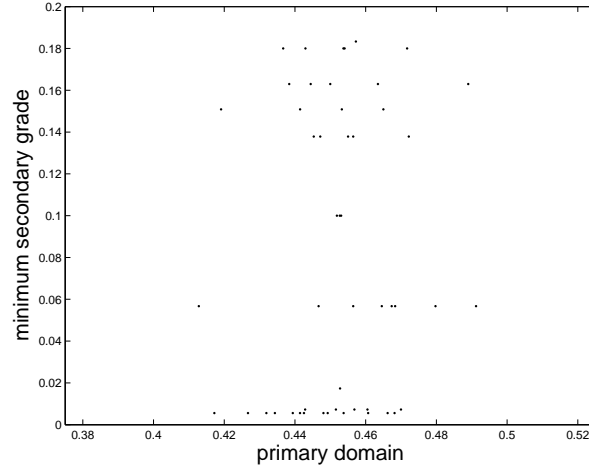


Figure 4: Strata formed by sampling 50 TRS tuples from a discretised general T2FS.

A stratum may be formally defined thus:

Definition 1 (Stratum [22]). “Let T be the TRS of a discretised general type-2 fuzzy set. A stratum, S_{ω} , is a subset³ of T for which every element has the same membership grade.

$$S_{\omega} = \{(x, \mu_T(x)) \in T \mid \mu_T(x) = \omega, \text{ for some } \omega \in [0, 1]\}.” \quad (9)$$

4.2. The TRS Shell

The Stratic Defuzzifier is an innovation based on the novel concept of the *TRS shell*.

³Here the widely understood *crisp* subset is intended. In [27, Page 19] the *fuzzy* definition of subset is given.

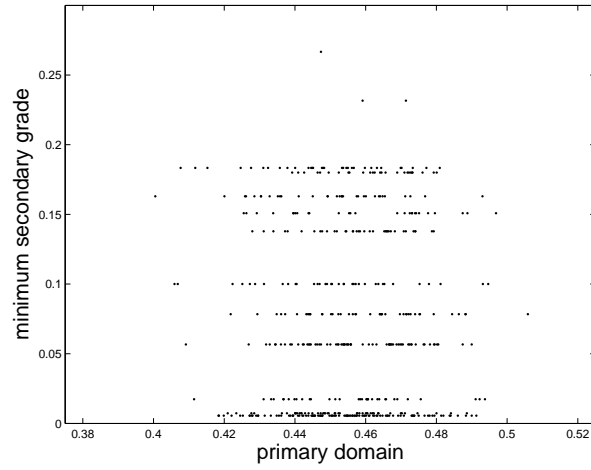


Figure 5: Strata formed by sampling 500 TRS tuples from the same discretised general T2FS shown in Figure 4.

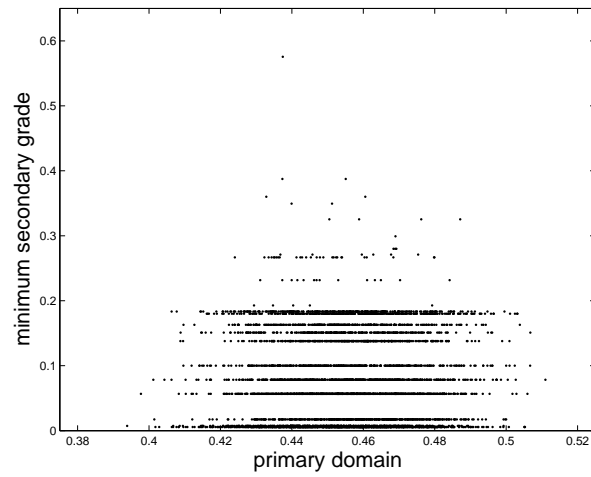


Figure 6: Strata formed by sampling 5000 TRS tuples from the same discretised general T2FS shown in Figure 4

Definition 2 (TRS Shell (TRSS)). *The TIFS*

$$shell_T = \bigcup_{\omega \in [0,1]} shell_\omega, \quad (10)$$

where $shell_\omega = \{(x_m, \mu_T(x_m)), (x_M, \mu_T(x_M))\}$; $x_m = \min \{x | (x, \mu_T(x)) \in S_\omega\}$ and $x_M = \max \{x | (x, \mu_T(x)) \in S_\omega\}$, consists solely of the TRS tuples that lie at the end points of the strata, and is termed the shell of the TRS T of a discretised general T2FS.

The only totally accurate way of constructing the TRS is via Exhaustive Defuzzification. The TRSS is a TIFS approximating to the TRS. The idea of Stratic Defuzzification is to use the TRSS as a substitute for the TRS. This has the advantage that the TRSS is generated by an algorithm whose computational complexity is minimal relative to that of the Exhaustive Method. By defuzzifying the TRSS, a crisp number that approximates to the defuzzified value of the originating T2FS is obtained.


The TRSS is formed of all the strata end points; the Stratic Type-Reduction strategy (Algorithm 1, Figure 8) consists of determining the heights at which the strata lie, then locating their end points by applying the KMIP to each one in turn. Stratic Defuzzification, as with Exhaustive Defuzzification (and indeed all the efficient type-2 defuzzification alternatives listed in Subsection 3.3), is a two-stage procedure of type-reduction (to the TRSS), followed by type-1 defuzzification of the TRSS.

The originality of this strategy lies in its exploitation of the T2FS's naturally occurring characteristic of stratification. From the T2FS's stratified structure the end points and height of each stratum may be extracted and amalgamated to form the TRSS.

The interval KMIP (and its variants such as EIASC) may be seen as special cases of Stratic Defuzzification, in which only one stratum is involved. In this case the TRSS consists of the left and right end points of that stratum. The reason that the KMIP and the Stratic Method of Defuzzification are both approximate techniques is that those tuples within the TRS but not on the TRSS are disregarded.

5. Experimental Evaluation of the Stratic Defuzzifier

To be acceptable as a type-2 defuzzification technique, the Stratic Defuzzifier has to be demonstrated to possess good accuracy and efficiency. The experiments described below assess the algorithm in both respects.

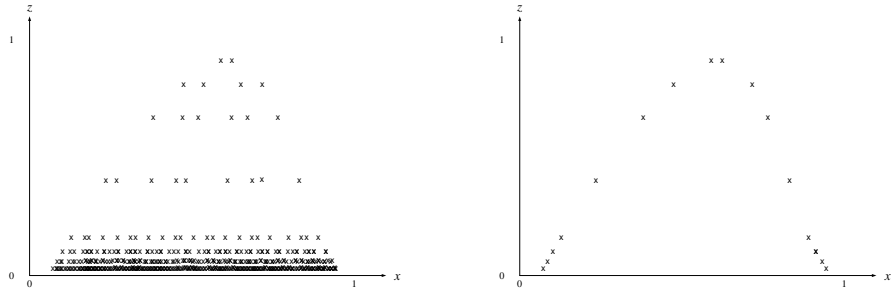

(a) A TRS, with the strata clearly visible. (b) The TRSS corresponding to the TRS depicted in Figure 7(a)

Figure 7: By eliminating all the tuples that lie between the end points of the strata, the TRS is transformed into the TRSS.

Input: a discretised general T2FS

Output: defuzzified value of the T2FS

- 1 initialise the TRSS to consist of 0 tuples {The TRSS is initially empty.} ;
- 2 determine the heights (secondary membership grades) of all the strata ;
- 3 **forall the strata do**
- 4 apply EIASC to find the stratum's end points ;
- 5 pair the each stratum end point (x) with the stratum height (z) to give two tuples (x, z) ;
- 6 store both tuples in the TRSS ;
- 7 **end**
- 8 defuzzify the TRSS {The TRSS is a T1FS.} ;

Algorithm 1: Stratic Defuzzification.

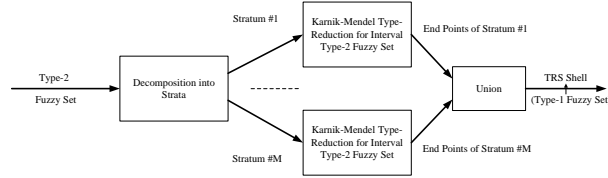


Figure 8: Principle stages of the Stratic Defuzzifier

Six discretised general T2FSs were generated (Figures 9 to 14), to be used as test sets. These aggregated sets are products of the inferencing stage of a general type-2 FIS prototype (Figure 1), coded⁴ in MatlabTM. They possess diverse properties; Table 1 summarises their salient features. For each inference a sufficiently coarse degree of discretisation was selected to enable Exhaustive Defuzzification to complete within a reasonable time, so that the benchmark defuzzified value could be determined. Three rule sets were used [17]. The FIS was invoked twice for each rule set, with differing input parameters.

The defuzzification algorithms were coded in MatlabTM R2014a and tested on a PC with an Intel(R) CoreTM i5-4570 CPU and 8.00 GB RAM, running at a clock speed 3.20 GHz, using the MS Windows 10 Education operating system. Each test program process was run with priority higher than that of the operating system, going some way to eliminating timing errors arising from unrelated operating system processes.

For the α -Planes/KMIP Method, it is necessary for the developer to choose the number of α -planes. In contrast, neither the Exhaustive Defuzzifier nor the Stratic Defuzzifier require this extra parameter.

For tests on the Stratic Defuzzifier and α -Planes/EIASC Method, in order to allow for unmitigated, irrelevant operating system processes, 100 timings were

⁴The code for the creation and defuzzification of the test sets is located at <http://www.tech.dmu.ac.uk/~sarahg/>.

taken; the means and standard deviations were calculated. This meant that each test set was defuzzified

- once Exhaustively;
- 100 times using the Stratic Defuzzifier;
- 100 times through the α -Planes/EIASC Method using 5 evenly spaced α -planes;
- 100 times through the α -Planes/EIASC Method using 11 evenly spaced α -planes;
- 100 times through the α -Planes/EIASC Method using 21 evenly spaced α -planes;
- 100 times through the α -Planes/EIASC Method using 51 evenly spaced α -planes;
- 100 times through the α -Planes/EIASC Method using 101 evenly spaced α -planes.


For each test set, the number of embedded sets and the number of strata are included in Table 1.

TEST SET	NORMAL FOU?	NORMAL SEC. MF?	NARROW FOU?	NO. OF EMB. SETS	NO. OF STRATA
Heater0.125	✓	×	×	14580	4
Heater0.0625	✓	×	✓	13778100	17
Powder0.1	✓	×	✓	24300	13
Powder0.05	✓	✓	✓	3840000	35
Shopping0.2	×	×	×	16	1
Shopping0.1	✓	✓	×	312500	13


Table 1: Salient properties of the test sets.

5.1. Results and Discussion

Tables 2 to 7 show the results in relation to accuracy; tables 8 to 13 show the results in relation to speed of execution.

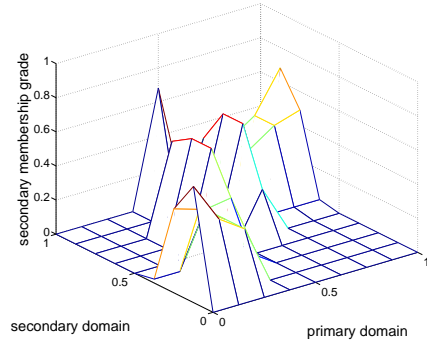


(a) 3-D representation.

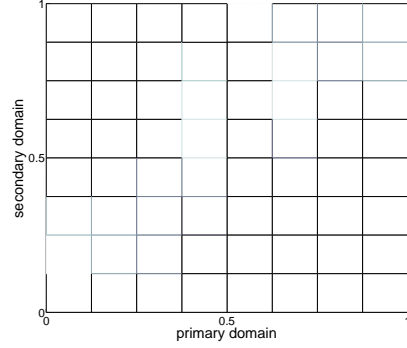


(b) FOU.

Figure 9: Heater0.125 — a general type-2 fuzzy test set generated by the Heater FIS; both the domain and co-domain degrees of discretisation are 0.125.

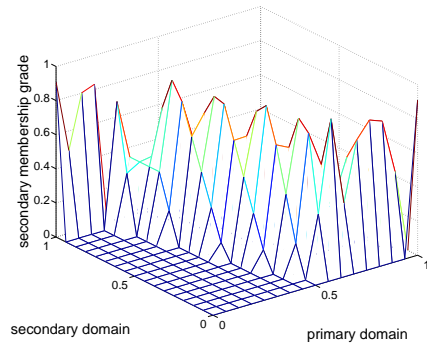


(a) 3-D representation.

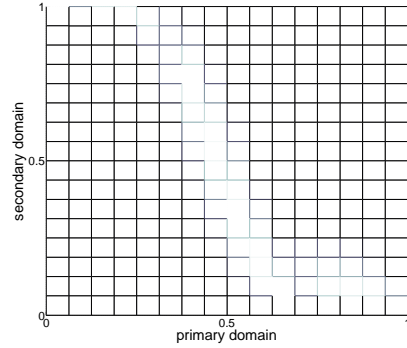


(b) FOU.

Figure 10: Heater0.0625 — a general type-2 fuzzy test set generated by the Heater FIS; both the domain and co-domain degrees of discretisation are 0.0625.

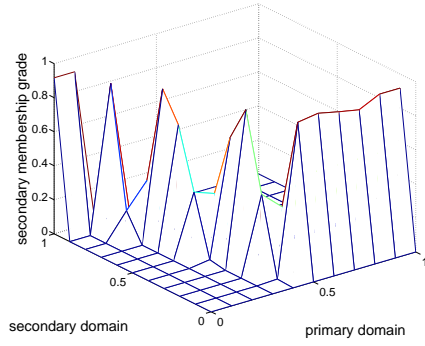


(a) 3-D representation.

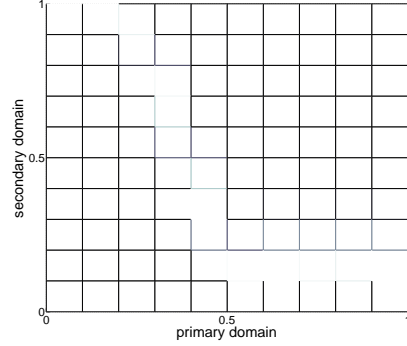


(b) FOU.

Figure 11: Powder0.1 — a general type-2 fuzzy test set generated by the Powder FIS; both the domain and co-domain degrees of discretisation are 0.1.

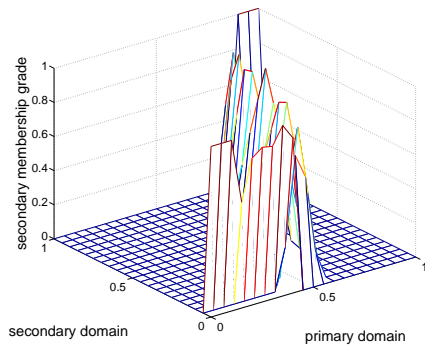


(a) 3-D representation.

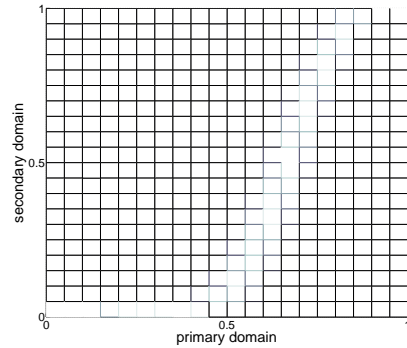


(b) FOU.

Figure 12: Powder0.05 — a general type-2 fuzzy test set generated by the Powder FIS; both the domain and co-domain degrees of discretisation are 0.05.

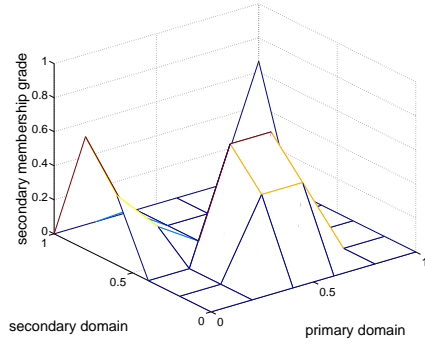


(a) 3-D representation.

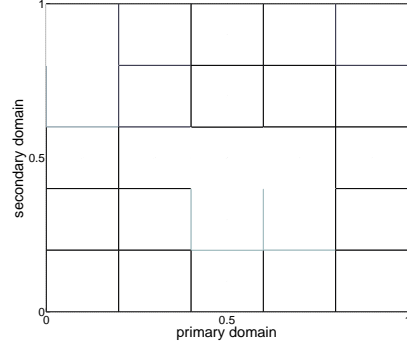


(b) FOU.

Figure 13: Shopping0.2 — a general type-2 fuzzy test set generated by the Shopping FIS; both the domain and co-domain degrees of discretisation are 0.2.

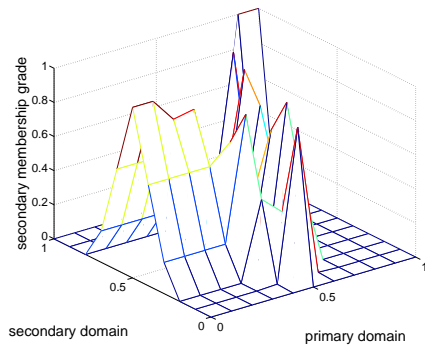

(a) 3-D representation.

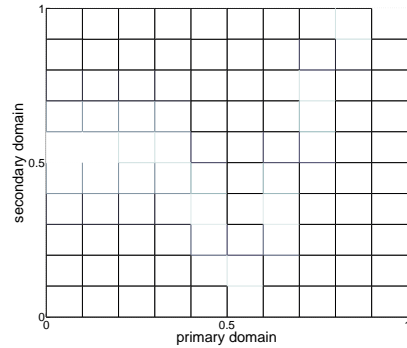

(b) FOU.

Figure 14: Shopping0.1 — a general type-2 fuzzy test set generated by the Shopping FIS; both the domain and co-domain degrees of discretisation are 0.1.

Test Set: Heater0.125	Defuzzified Value	DV Error	Accuracy Ranking
Exhaustive Defuzzification	0.6313618377	N/A	
Stratic Defuzzification: 4 Planes	0.6344757121	0.0031138744	1
α -Planes/EIASC: 11 Planes	0.6203643676	-0.0109974701	2
α -Planes/EIASC: 21 Planes	0.6178091252	-0.0135527125	3
α -Planes/EIASC: 51 Planes	0.6151293494	-0.0162324883	4
α -Planes/EIASC: 101 Planes	0.6148483161	-0.0165135216	5
α -Planes/EIASC: 5 Planes	0.6015861938	-0.0297756439	6

Table 2: Defuzzified values for the test set Heater0.125 under Exhaustive Defuzzification, Stratic Defuzzification and α -Planes/EIASC. Exhaustive Defuzzification provides the standard for accuracy, from which the error is calculated and hence the ranking derived.

Test Set: Heater0.0625	Defuzzified Value	DV Error	Accuracy Ranking
Exhaustive Defuzzification	0.2621587894	N/A	
Stratic Defuzzification: 17 Planes	0.2556804862	-0.0064783032	1
α -Planes/EIASC: 11 Planes	0.2784258103	0.0162670209	2
α -Planes/EIASC: 21 Planes	0.2832087215	0.0210499321	3
α -Planes/EIASC: 5 Planes	0.2834726301	0.0213138407	4
α -Planes/EIASC: 51 Planes	0.2837306962	0.0215719068	5
α -Planes/EIASC: 101 Planes	0.2849751274	0.0228163380	6

Table 3: Defuzzified values for the test set Heater0.0625 under Exhaustive Defuzzification, Stratic Defuzzification and α -Planes/EIASC. Exhaustive Defuzzification provides the standard for accuracy, from which the error is calculated and hence the ranking derived.

Test Set: Powder0.1	Defuzzified Value	DV Error	Accuracy Ranking
Exhaustive Defuzzification	0.2806983775	N/A	
α -Planes/EIASC: 11 Planes	0.2856771537	0.0049787762	1
α -Planes/EIASC: 21 Planes	0.2899246043	0.0092262268	2
α -Planes/EIASC: 101 Planes	0.2905238149	0.0098254374	3
α -Planes/EIASC: 51 Planes	0.2924872462	0.0117888687	4
α -Planes/EIASC: 5 Planes	0.2985191723	0.0178207948	5
Stratic Defuzzification: 17 Planes	0.2508410831	-0.0298572944	6

Table 4: Defuzzified values for the test set Powder0.1 under Exhaustive Defuzzification, Stratic Defuzzification and α -Planes/EIASC. Exhaustive Defuzzification provides the standard for accuracy, from which the error is calculated and hence the ranking derived.

Test Set: Powder0.05	Defuzzified Value	DV Error	Accuracy Ranking
Exhaustive Defuzzification	0.8180632180	N/A	
Stratic Defuzzification: 35 Planes	0.8210022735	0.0029390555	1
α -Planes/EIASC: 5 Planes	0.8133958352	-0.0046673828	2
α -Planes/EIASC: 11 Planes	0.8031191474	-0.0149440706	3
α -Planes/EIASC: 21 Planes	0.8002826730	-0.0177805450	4
α -Planes/EIASC: 51 Planes	0.7990107273	-0.0190524907	5
α -Planes/EIASC: 101 Planes	0.7986380906	-0.0194251274	6

Table 5: Defuzzified values for the test set Powder0.05 under Exhaustive Defuzzification, Stratic Defuzzification and α -Planes/EIASC. Exhaustive Defuzzification provides the standard for accuracy, from which the error is calculated and hence the ranking derived.

Test Set: Shopping0.2	Defuzzified Value	DV Error	Accuracy Ranking
Exhaustive Defuzzification	0.5481044441	N/A	
Stratic Defuzzification: 1 Plane	0.5488888889	0.0007844448	1
α -Planes/EIASC: 11 Planes	0.5382327803	-0.0098716638	2
α -Planes/EIASC: 21 Planes	0.5365971981	-0.0115072460	3
α -Planes/EIASC: 51 Planes	0.5363332587	-0.0117711854	4
α -Planes/EIASC: 101 Planes	0.5362490859	-0.0118553582	5
α -Planes/EIASC: 5 Planes	0.5359967320	-0.0121077121	6

Table 6: Defuzzified values for the test set Shopping0.2 under Exhaustive Defuzzification, Stratic Defuzzification and α -Planes/EIASC. Exhaustive Defuzzification provides the standard for accuracy, from which the error is calculated and hence the ranking derived.

Test Set: Shopping0.1	Defuzzified Value	DV Error	Accuracy Ranking
Exhaustive Defuzzification	0.5954109472	N/A	
α -Planes/EIASC: 11 Planes	0.5949939045	-0.0004170427	1
Stratic Defuzzification: 13 Planes	0.5967388964	0.0013279492	2
α -Planes/EIASC: 21 Planes	0.5934031254	-0.0020078218	3
α -Planes/EIASC: 51 Planes	0.5924808745	-0.0029300727	4
α -Planes/EIASC: 101 Planes	0.5924190421	-0.0029919051	5
α -Planes/EIASC: 5 Planes	0.6021700303	0.0067590831	6

Table 7: Defuzzified values for the test set Shopping0.1 under Exhaustive Defuzzification, Stratic Defuzzification and α -Planes/EIASC. Exhaustive Defuzzification provides the standard for accuracy, from which the error is calculated and hence the ranking derived.

Test Set: Heater0.125	No. of Reps.	Mean Defuzz. Time	SD of Defuzz. Times	Time per Plane
Exhaustive Defuzzification	1	1.0126530	N/A	N/A
α -Planes/EIASC: 101 Planes	100	0.0038446	0.0000329	0.0000381
α -Planes/EIASC: 51 Planes	100	0.0019563	0.0000260	0.0000384
α -Planes/EIASC: 11 Planes	100	0.0004315	0.0000209	0.0000392
α -Planes/EIASC: 21 Planes	100	0.0008262	0.0000318	0.0000393
α -Planes/EIASC: 5 Planes	100	0.0003198	0.0011503	0.0000640
Stratic Defuzz.: 4 Planes	100	0.0004614	0.0012418	0.0001154

Table 8: Timings for the test set Heater0.125 under Exhaustive Defuzzification, Stratic Defuzzification and α -Planes/EIASC.

Test Set: Heater0.0625	No. of Reps.	Mean Defuzz. Time	SD of Defuzz. Times	Time per Plane
Exhaustive Defuzzification	1	1013.0866	N/A	N/A
α -Planes/EIASC: 5 Planes	100	0.0004208	0.0000923	0.0000842
α -Planes/EIASC: 101 Planes	100	0.0086291	0.0000559	0.0000854
α -Planes/EIASC: 51 Planes	100	0.0043839	0.0000351	0.0000860
α -Planes/EIASC: 21 Planes	100	0.0018436	0.0000305	0.0000878
Stratic Defuzz.: 17 Planes	100	0.0015460	0.0001042	0.0000909
α -Planes/EIASC: 11 Planes	100	0.0010071	0.0000244	0.0000916

Table 9: Timings for the test set Heater0.0625 under Exhaustive Defuzzification, Stratic Defuzzification and α -Planes/EIASC.

Test Set: Powder0.1	No. of Reps.	Mean Defuzz. Time	SD of Defuzz. Times	Time per Plane
Exhaustive Defuzzification	1	1.7176950	N/A	N/A
α -Planes/EIASC: 101 Planes	100	0.0061603	0.0000508	0.0000610
α -Planes/EIASC: 51 Planes	100	0.0031180	0.0000268	0.0000611
α -Planes/EIASC: 21 Planes	100	0.0013062	0.0000197	0.0000622
α -Planes/EIASC: 5 Planes	100	0.0003181	0.0000871	0.0000636
α -Planes/EIASC: 11 Planes	100	0.0007065	0.0000191	0.0000642
Stratic Defuzz.: 17 Planes	100	0.0010072	0.0001116	0.0000775

Table 10: Timings for the test set Powder0.1 under Exhaustive Defuzzification, Stratic Defuzzification and α -Planes/EIASC.

Test Set: Powder0.05	No. of Reps.	Mean Defuzz. Time	SD of Defuzz. Times	Time per Plane
Exhaustive Defuzzification	1	305.0580000	N/A	N/A
Stratic Defuzz.: 35 Planes	100	0.0037333	0.0001257	0.0001067
α -Planes/EIASC: 101 Planes	100	0.0112556	0.0000826	0.0001114
α -Planes/EIASC: 51 Planes	100	0.0057244	0.0000740	0.0001122
α -Planes/EIASC: 21 Planes	100	0.0024003	0.0000365	0.0001143
α -Planes/EIASC: 11 Planes	100	0.0012847	0.0000221	0.0001168
α -Planes/EIASC: 5 Planes	100	0.0006142	0.0000927	0.0001228

Table 11: Timings for the test set Powder0.05 under Exhaustive Defuzzification, Stratic Defuzzification and α -Planes/EIASC.

Test Set: Shopping0.2	No. of Reps.	Mean Defuzz. Time	SD of Defuzz. Times	Time per Plane
Exhaustive Defuzzification	1	0.0013220	N/A	N/A
α -Planes/EIASC: 101 Planes	100	0.0032082	0.0000314	0.0000318
α -Planes/EIASC: 51 Planes	100	0.0016533	0.0000326	0.0000324
α -Planes/EIASC: 21 Planes	100	0.0007042	0.0000269	0.0000335
α -Planes/EIASC: 11 Planes	100	0.0003745	0.0000249	0.0000340
α -Planes/EIASC: 5 Planes	100	0.0002108	0.0001115	0.0000422
Stratic Defuzz.: 1 Plane	100	0.0001745	0.0000858	0.0001745

Table 12: Timings for the test set Shopping0.2 under Exhaustive Defuzzification, Stratic Defuzzification and α -Planes/EIASC.

Test Set: Shopping0.1	No. of Reps.	Mean Defuzz. Time	SD of Defuzz. Times	Time per Plane
Exhaustive Defuzzification	1	22.3481430	N/A	N/A
α -Planes/EIASC: 101 Planes	100	0.0068777	0.0000549	0.0000681
α -Planes/EIASC: 51 Planes	100	0.0034977	0.0000265	0.0000686
α -Planes/EIASC: 21 Planes	100	0.0014698	0.0000215	0.0000700
α -Planes/EIASC: 11 Planes	100	0.0007865	0.0000191	0.0000715
Stratic Defuzz.: 13 Planes	100	0.0009551	0.0000896	0.0000735
α -Planes/EIASC: 5 Planes	100	0.0004042	0.0000826	0.0000808

Table 13: Timings for the test set Shopping0.1 under Exhaustive Defuzzification, Stratic Defuzzification and α -Planes/EIASC.

Test Set	Table Number	Ranking of Stratic Defuzzifier
Heater0.125	2	1
Heater0.0625	3	1
Powder0.1	4	6
Powder0.05	5	1
Shopping0.2	6	1
Shopping0.1	7	2

Table 14: Accuracy ranking for the Stratic Defuzzification relative to 5 instances of the α -Planes/EIASC Method employing different numbers of α -planes.

5.2. Accuracy

5.2.1. The relationship between the α -Planes Method and Exhaustive Defuzzification

Are the α -Planes Method and Exhaustive Defuzzification equivalent? Theorem 2 of Liu’s 2008 paper on the α -Planes Method states,

“For minimum t -norm operation, centroid type-reduction for a type-2 fuzzy set \tilde{A} is the union of the centroids of its associated type-2 fuzzy sets $\tilde{A}(\alpha)$, with $\alpha \in [0, 1]$, i.e.,

$$Y_c = \int_{\alpha \in [0,1]} \text{Centroid}(\tilde{A}(\alpha)) = \int_{\alpha \in [0,1]} \alpha / \text{domain}(\text{Centroid}(\tilde{A}(\alpha))).”$$

However the proof presented [31, Page 2235] does not take Exhaustive Defuzzification as its starting point; no mention is made of embedded sets, let alone the determination of the minimum secondary grade of each embedded set⁵. Consequently it has not been shown that the α -Planes Method is equivalent to Exhaustive Defuzzification; these two methods cannot be expected to give identical results. Since the Exhaustive Defuzzifier provides the benchmark for accuracy, it follows that the α -Planes Method is approximate.

Comparative experiments bear this out [17, Page 15]. These indicate an issue with the α -Planes Method in that as the number of α -planes increases, the

⁵Moreover, the highly pertinent concept of *truncation* [19] is not touched upon.

α -Planes Method results fail to converge to the value obtained by General Exhaustive Defuzzification, but actually converge to another value. Moreover even the α -Planes/Interval Exhaustive results do not converge to this value. This discrepancy reveals an issue with the α -planes method itself, which has been previously discussed in [24] and [16].

For the α -Planes Method, since the concept of the *truncation grade* [19] is absent, slicing is performed in the region above the truncation grade [19]. Doing this impairs accuracy and wastes time.

Rather than regarding Stratic Defuzzification as a new technique which resembles the α -Planes Method, the α -Planes Method is best viewed as an approximation to Stratic Defuzzification, which is itself an approximation to Exhaustive defuzzification.

5.3. Speed

The experimental results relating to speed of execution are shown in Tables 8 to 13. It is clear that both the Stratic Defuzzifier and the α -Planes/EIASC Method execute many times faster than the Exhaustive Defuzzifier.

For each test set:

1. For the α -Planes/EIASC Method, the defuzzification time divided by the number of α -planes is fairly constant;
2. The defuzzification time per stratum is similar to, though usually slightly greater than, the defuzzification times per α -plane.

Thus the speed of execution correlates with the number of planes (whether strata or α -planes) involved in the defuzzification process.

6. Conclusions

This paper reports on the Stratic Method of Defuzzification for discretised, general T2FSs. This novel strategy makes use of the naturally occurring feature of stratification evident within the TRS.

Strata and α -planes are indistinguishable in terms of properties; the difference between a stratum and an α -plane is solely a matter of how each is generated. It is intuitively appealing to defuzzify a general T2FS by slicing it horizontally to produce α -planes or strata. However the Stratic Defuzzifier is a more elegant

solution to general type-2 defuzzification than the α -Planes Method as it is a self-contained technique; it does not require the introduction of arbitrary, user defined parameters.

Using the standard of Exhaustive Defuzzification, experiments show the Stratic Defuzzifier to have excellent accuracy as well as outstanding speed. Compared to the α -Planes/EIASC Method, the Stratic Defuzzifier has greater accuracy in four out of six test cases. As regards efficiency, the Stratic Defuzzifier and the α -Planes/EIASC Method are comparable. Excepting test sets with low numbers of strata, there is a correlation between the defuzzification time per stratum and the defuzzification time per α -plane.

6.1. Future Research

- It would be useful to employ rigorous statistical tests to contrast the performance of the Stratic Defuzzifier with other options for type-2 defuzzification (besides the α -Planes Method). In 2013 Greenfield and Chiclana evaluated and contrasted general type-2 defuzzification techniques [17], but it is appropriate to update this research as since then other strategies have been developed, among them the GGCCD [20].
- Experiments contrasting the performance of the Stratic Defuzzifier with the α -Planes Method using the same number of planes for each strategy may give more insight into their differing accuracies⁶.
- An evaluation of the impact of using other interval defuzzification techniques instead of EIASC would be valuable.

References

- [1] G. Acampora, D. Alghazzawi, H. Hagra, and A. Vitiello. An interval type-2 fuzzy logic based framework for reputation management in peer-to-peer e-commerce. *Information Sciences*, 333:88 – 107, 2016.
- [2] J. Aisbett, J. T. Rickard, and D. G. Morgenthaler. Type-2 Fuzzy Sets as Functions on Spaces. *IEEE Transactions on Fuzzy Systems*, 18(4):841–844, August 2010.

⁶The Stratic Defuzzifier would determine the number of α -planes to be used.

- [3] N. Anh, S. Suresh, M. Pratama, and N. Srikanth. Interval prediction of wave energy characteristics using meta-cognitive interval type-2 fuzzy inference system. *Knowledge-Based Systems*, 169:28 – 38, 2019. doi: <https://doi.org/10.1016/j.knosys.2019.01.025>.
- [4] O. Castillo and L. Amador-Angulo. A generalized type-2 fuzzy logic approach for dynamic parameter adaptation in bee colony optimization applied to fuzzy controller design. *Information Sciences*, 460 – 461:476 – 496, 2018.
- [5] O. Castillo and P. Melin. A review on interval type-2 fuzzy logic applications in intelligent control. *Information Sciences*, 279:615 – 631, 2014. doi: <http://dx.doi.org/10.1016/j.ins.2014.04.015>.
- [6] O. Castillo, L. Cervantes, J. Soria, M. Sanchez, and J. R. Castro. A generalized type-2 fuzzy granular approach with applications to aerospace. *Information Sciences*, 354:165 – 177, 2016.
- [7] H. Chaoui, M. Khayamy, and A. A. Aljarboua. Adaptive interval type-2 fuzzy logic control for pmsm drives with a modified reference frame. *IEEE Transactions on Industrial Electronics*, 64(5):3786 – 3797, 2017.
- [8] D. S. Comas, J. I. Pastore, A. Bouchet, V. L. Ballarin, and G. J. Meschino. Interpretable interval type-2 fuzzy predicates for data clustering: A new automatic generation method based on self-organizing maps. *Knowledge-Based Systems*, 133:234 – 254, 2017. doi: <https://doi.org/10.1016/j.knosys.2017.07.012>.
- [9] Z. Du, Y. Kao, and J. H. Park. Interval type-2 fuzzy sampled-data control of time-delay systems. *Information Sciences*, 487:193 – 207, 2019.
- [10] E. Ontiveros-Robles and P. Melin. Toward a development of general type-2 fuzzy classifiers applied in diagnosis problems through embedded type-1 fuzzy classifiers. *Soft Computing*, 24:83 – 99, 2020.
- [11] M. Esposito and G. De Pietro. Interval type-2 fuzzy logic for encoding clinical practice guidelines. *Knowledge-Based Systems*, 54:329 – 341, 2013. DOI: <http://dx.doi.org/10.1016/j.knosys.2013.10.001>.
- [12] M. Ghaemi, S. K. Hosseini-Sani, and M. H. Khooban. Direct adaptive general type-2 fuzzy control for a class of uncertain non-linear systems. *IET Science, Measurement & Technology*, 8(6):518 – 527, 2014.

- [13] C. I. Gonzalez, P. Melin, and O. Castillo. Edge detection method based on general type-2 fuzzy logic applied to color images. *Information*, 8(3):104, 2017.
- [14] S. Greenfield. The Grid Method of Discretisation for Type-2 Fuzzy Sets. In *Proc. UK Workshop on Computational Intelligence 2012*, Edinburgh, September 2012.
- [15] S. Greenfield. Uncertainty Measurement for the Interval Type-2 Fuzzy Set. pages 183 – 194, Zakopane, Poland, 2016. 15th International Conference on Artificial Intelligence and Soft Computing (ICAISC 2016).
- [16] S. Greenfield and F. Chiclana. Combining the α -Plane Representation with an Interval Defuzzification Method. In *Proceedings of EUSFLAT-LFA 2011*, pages 920 – 927, Aix-les-Bains, France, July 2011.
- [17] S. Greenfield and F. Chiclana. Defuzzification of the Discretised Generalised Type-2 Fuzzy Set: Experimental Evaluation. *Information Sciences*, 244:1 – 25, September 2013. DOI: <http://dx.doi.org/10.1016/j.ins.2013.04.032>.
- [18] S. Greenfield and F. Chiclana. Fuzzy in 3D: Two Contrasting Paradigms. *Archives for the Philosophy and History of Soft Computing*, 2, 2015. <http://www.aphsc.org/index.php/aphsc/article/view/24> [Online; accessed 20-January-2016].
- [19] S. Greenfield and F. Chiclana. Type-Reduced Set structure and the truncated type-2 fuzzy set. *Fuzzy Sets and Systems*, 352:119 – 141, December 2018. DOI: <https://doi.org/10.1016/j.fss.2018.02.012>.
- [20] S. Greenfield and F. Chiclana. The Collapsing Defuzzifier for discretised generalised type-2 fuzzy sets. *International Journal of Approximate Reasoning*, 102:21 – 40, November 2018. DOI: <https://doi.org/10.1016/j.ijar.2018.07.008>.
- [21] S. Greenfield and R. I. John. Optimised Generalised Type-2 Join and Meet Operations. In *Proc. FUZZ-IEEE 2007*, pages 141 – 146, London, July 2007.
- [22] S. Greenfield and R. I. John. Stratification in the Type-Reduced Set and the Generalised Karnik-Mendel Iterative Procedure. In *Proc. IPMU 2008*, pages 1282 – 1289, Malaga, June 2008.

- [23] S. Greenfield and R. I. John. The Uncertainty Associated with a Type-2 Fuzzy Set. In *R. Seising (editor) Views on Fuzzy Sets and Systems from Different Perspectives*, in ‘*Studies in Fuzziness and Soft Computing*’, series editor J. Kacprzyk, volume 243, pages 471 – 483. Springer-Verlag, 2009. DOI: http://dx.doi.org/10.1007/978-3-540-93802-6_23.
- [24] S. Greenfield, F. Chiclana, S. Coupland, and R. I. John. Type-2 Defuzzification: Two Contrasting Approaches. In *Proceedings of FUZZ-IEEE 2010*, pages 1 – 7, Barcelona, July 2010. DOI: <http://dx.doi.org/10.1109/FUZZY.2010.5584007>.
- [25] S. Greenfield, F. Chiclana, R. I. John, and S. Coupland. The Sampling Method of Defuzzification for Type-2 Fuzzy Sets: Experimental Evaluation. *Information Sciences*, 189:77 – 92, April 2012. DOI: <http://dx.doi.org/10.1016/j.ins.2011.11.042>.
- [26] N. N. Karnik and J. M. Mendel. Centroid of a Type-2 Fuzzy Set. *Information Sciences*, 132:195 – 220, 2001.
- [27] G. J. Klir and T. A. Folger. *Fuzzy Sets, Uncertainty, and Information*. Prentice-Hall International, 1992.
- [28] G. J. Klir and B. Yuan. *Fuzzy Sets and Fuzzy Logic*. Prentice-Hall PTR, 1995.
- [29] T. Kumbasar and H. Hagsras. A self-tuning zSlices-based general type-2 fuzzy PI controller. *IEEE Transactions on Fuzzy Systems*, 23(4):991 – 1013, 2015.
- [30] O. Linda and M. Manic. General Type-2 Fuzzy C-Means Algorithm for Uncertain Fuzzy Clustering. *IEEE Transactions on Fuzzy Systems*, 20(5): 883 – 897, October 2012. DOI: 10.1109/TFUZZ.2012.2187453.
- [31] F. Liu. An Efficient Centroid Type-Reduction Strategy for General Type-2 Fuzzy Logic System. *Information Sciences*, 178(9):2224–2236, 2008. DOI: 10.1016/j.ins.2007.11.014.
- [32] X. Liu and J. M. Mendel. Some Extensions of the Karnik-Mendel Algorithms for Computing an Interval Type-2 Fuzzy Set Centroid. In *Proceedings of the IEEE Symposium on Advances in Type-2 Fuzzy Logic Systems 2011*, Paris, April 2011.

- [33] L. Alberto Lucas, T. Mezzadri Centeno, and M. Regattieri Delgado. General Type-2 Fuzzy Inference Systems: Analysis, Design and Computational Aspects. In *Proceedings of FUZZ-IEEE 2007*, pages 1743–1747, London, 2007.
- [34] J. M. Mendel. *Uncertain Rule-Based Fuzzy Logic Systems: Introduction and New Directions*. Prentice-Hall PTR, 2001. ISBN 0-13-040969-3.
- [35] J. M. Mendel and R. I. John. Type-2 fuzzy sets made simple. *IEEE Transactions on Fuzzy Systems*, 10(2):117 – 127, 2002. DOI: <http://dx.doi.org/10.1109/91.995115>.
- [36] J. M. Mendel, F. Liu, and D. Zhai. α -Plane Representation for Type-2 Fuzzy Sets: Theory and applications. *IEEE Transactions on Fuzzy Systems*, 17(5): 1189 – 1207, 2009.
- [37] J. M. Mendel, M. R. Rajati, and P. Sussner. On clarifying some definitions and notations used for type-2 fuzzy sets as well as some recommended changes. *Information Sciences*, 340:337 – 345, 2016.
- [38] T. Nguyen, A. Khosravi, D. Creighton, and S. Nahavandi. Medical data classification using interval type-2 fuzzy logic system and wavelets. *Applied Soft Computing*, 30:812 – 822, 2015.
- [39] R. Ontiveros, P. Melin, and O. Castillo. New Methodology to Approximate Type-Reduction Based on a Continuous Root-Finding Karnik Mendel Algorithm. *Algorithms*, 10(3):77, 2017.
- [40] R. Ontiveros, P. Melin, and O. Castillo. High order α -planes integration: A new approach to computational cost reduction of General Type-2 Fuzzy Systems. *Engineering Applications of Artificial Intelligence*, 74:186 – 197, 2018.
- [41] P. Melin and E. Ontiveros-Robles and C. I. Gonzalez and J. R. Castro and O. Castillo. An approach for parameterized shadowed type-2 fuzzy membership functions applied in control applications. *Soft Computing*, 23:3887 – 3901, 2019.
- [42] L. Shrinivasan and J. R. Raol. Interval type-2 fuzzy-logic-based decision fusion system for air-lane monitoring. *IET Intelligent Transport Systems*, 12 (8):860 – 867, October 2018.

- [43] C. Wagner and H. Hagrass. Toward General Type-2 Fuzzy Logic Systems based on zSlices. *IEEE Transactions on Fuzzy Systems*, 18(4):637 – 660, 2010.
- [44] D. Wu and J. M. Mendel. Enhanced Karnik-Mendel Algorithms. *IEEE Transactions on Fuzzy Systems*, 17(4):923 – 934, August 2009.
- [45] D. Wu and M. Nie. Comparison and Practical Implementation of Type-Reduction Algorithms for Type-2 Fuzzy Sets and Systems. In *Proceedings of FUZZ-IEEE 2011*, pages 2131 – 2138, Taiwan, 2011.
- [46] Q. Wu, L. Zhou, Y. Chen, and H. Chen. An integrated approach to green supplier selection based on the interval type-2 fuzzy best-worst and extended vikor methods. *Information Sciences*, 502:394 – 417, 2019.
- [47] L. A. Zadeh. Fuzzy Sets. *Information and Control*, 8:338 – 353, 1965.
- [48] L. A. Zadeh. The Concept of a Linguistic Variable and its Application to Approximate Reasoning. *Information Sciences*, 8:199 – 249, 1975.
- [49] S.-M. Zhou, F. Chiclana, R. I. John, and J. M. Garibaldi. Type-1 OWA Operators for Aggregating Uncertain Information with Uncertain Weights Induced By Type-2 Linguistic Quantifiers. *Fuzzy Sets and Systems*, 159(24):3281 – 3296, December 2008. DOI: <http://dx.doi.org/10.1016/j.fss.2008.06.018>.